


产品名称:478310-04D

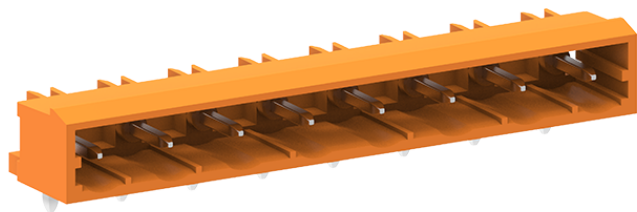

额定电流：16A 颜色：橙

Technical drawings of the PCB layout for the N15 connector. The top left shows a side view of the connector with dimensions: 1.20x1.20 mm footprint, 10.00 mm height, 11.96 mm total height, and 3.80±0.30 mm width. The top right shows a top view of the connector with dimensions: 4.00 mm offset, 7.62 mm pitch, 7.62x(P-1) mm length, and 7.62x(P-1)+8.00 mm total length. The bottom right shows a detailed PCB layout with dimensions: 4.00 mm offset, 10.00 mm height, 7.62 mm pitch, 7.62x(P-1) mm length, and a hole diameter of 1.90 mm.

参数

☞ 产品型号	478310-04D
☞ 产品间距	7.62
☞ 接线位数	10
☞ 接线方式	-

⌘ 防护等级	IP20
⌘ 工作温度	-40~+105°C
⌘ 绝缘材料	PA66
⌘ 绝缘材料组别	I
⌘ 导电体材料	Copper alloy
⌘ 导电体表面镀层	Sn,Plated
⌘ 颜色	橙色

技术数据

⌘ 额定电流（IEC）	16A
⌘ 额定电压（IEC）	630V
⌘ 过压类别	III III II
⌘ 污染等级	3 2 2
⌘ 额定冲击电压	6.0KV 6.0KV 6.0KV
⌘ 额定电流（UL）	15A 15A -
⌘ 额定电压(UL)	300V 300V -
⌘ 硬导线截面积	-
⌘ 柔性导线截面积	-
⌘ 柔性导线截面积，带绝缘管套	-
⌘ 锁线螺钉规格	-
⌘ 锁线螺钉扭矩	-
⌘ 固定螺钉规格	-
⌘ 剥线长度	-
⌘ 使用组别	B/C/D

宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号
High-tech Industrial Development
Zone, Cixi City, Zhejiang Province,
China

Zip code: 315303

邮编：315303

Switchboard: +86 574-63288158

总机：+86 574-63288158

Fax: +86 574-63288170

传真：+86 574-63288170

E-mail：supucontact@supu.cn

E-mail：supucontact@supu.cn

Service Hotline: 400-626-6336

服务热线：400-626-6336



官方微信