


产品名称:MC-PA5.0H08-0002

额定电流：18A 颜色：可定制

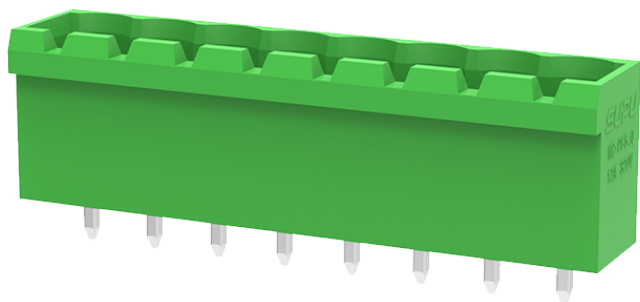

Technical drawing of the MC-PASO connector showing three views: side, top, and PCB layout.

Side View (Left): Shows the profile of the connector. Dimensions include a total width of 3.50 ± 0.30 , a mounting hole diameter of $\varnothing 1.00$, a height of 3.80 , and a rear flange height of 8.45 . The main body length is 12.00 . Orientation markers Y and Z are shown.

Top View (Middle): Shows the connector from above. It features 10 pins arranged in two rows of 5. Dimensions include a pin pitch of 5.00 , a total pin width of $5.00 \cdot (P-1) + 7$, and overall dimensions $Dim.a$ and $Dim.b$. A reference marker X is shown.

PCB Layout (Bottom): Shows the footprint of the connector on a PCB. It includes dimensions for the pin pitch (5.00), overall width ($Dim.a$), and height (8.45). A reference hole is indicated as $Ref. (\varnothing 1.40)$. The overall width of the footprint is 3.50 . The text "PCB LAYOUT" is centered below the drawing.

参数

☞ 产品型号	MC-PA5.0H08-0002
☞ 产品间距	5.0
☞ 接线位数	8
☞ 接线方式	-

☞ 防护等级	IP20
☞ 工作温度	-40~+105°C
☞ 绝缘材料	PA66
☞ 绝缘材料组别	I
☞ 导电体材料	Copper alloy
☞ 导电体表面镀层	Sn,Plated
☞ 颜色	绿/黑/蓝/灰/橙/红

技术数据

☞ 额定电流（IEC）	18A
☞ 额定电压（IEC）	320V
☞ 过压类别	III III II
☞ 污染等级	3 2 2
☞ 额定冲击电压	4.0KV 4.0KV 4.0KV
☞ 额定电流（UL）	15A - 10A
☞ 额定电压(UL)	300V - 300V
☞ 硬导线截面积	-
☞ 柔性导线截面积	-
☞ 柔性导线截面积，带绝缘管套	-
☞ 锁线螺钉规格	-
☞ 锁线螺钉扭矩	-
☞ 固定螺钉规格	-
☞ 剥线长度	-
☞ 使用组别	B/C/D

宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号
High-tech Industrial Development
Zone, Cixi City, Zhejiang Province,
China

Zip code: 315303

邮编：315303

Switchboard: +86 574-63288158

总机：+86 574-63288158

Fax: +86 574-63288170

传真：+86 574-63288170

E-mail：supucontact@supu.cn

E-mail：supucontact@supu.cn

Service Hotline: 400-626-6336

服务热线：400-626-6336



官方微信