


产品名称:MC-PA5.0V12-0002

额定电流：18A 颜色：可定制

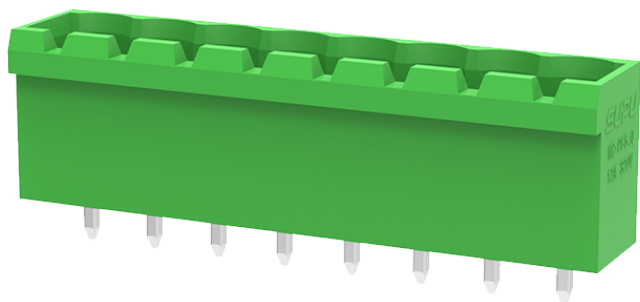

Technical drawing of the MC-PASO connector, showing three views: side view, top view, and PCB layout.

Side View: Shows the profile of the connector. Key dimensions include a total width of 3.50 ± 0.30 , a mounting hole diameter of $\phi 1.00$, a mounting hole offset of 3.80 , and a body height of 8.45 . The connector is labeled "SUN MC-PASO" and "CE".

Top View: Shows the top of the connector. Key dimensions include a total width of 3.50 , a pitch of 5.00 , and a total length of $5.0 \times (P-1) + 7$. The dimensions are labeled as "Dim.a" and "Dim.b".

PCB LAYOUT: Shows the layout of the connector on a PCB. Key dimensions include a total width of 3.50 , a pitch of 5.00 , and a total length of $5.0 \times (P-1) + 7$. The dimensions are labeled as "Dim.a" and "Dim.b". The layout also shows a reference dimension of $\text{Ref.}(\phi 1.40)$ and a mounting hole diameter of $\phi 1.00$.

参数

☞ 产品型号	MC-PA5.0V12-0002
☞ 产品间距	5.0
☞ 接线位数	12
☞ 接线方式	-

☞ 防护等级	IP20
☞ 工作温度	-40~+105°C
☞ 绝缘材料	PA66
☞ 绝缘材料组别	I
☞ 导电体材料	Copper alloy
☞ 导电体表面镀层	Sn,Plated
☞ 颜色	绿/黑/蓝/灰/橙/红

技术数据

☞ 额定电流（IEC）	18A
☞ 额定电压（IEC）	320V
☞ 过压类别	III III II
☞ 污染等级	3 2 2
☞ 额定冲击电压	4.0KV 4.0KV 4.0KV
☞ 额定电流（UL）	15A - 10A
☞ 额定电压(UL)	300V - 300V
☞ 硬导线截面积	-
☞ 柔性导线截面积	-
☞ 柔性导线截面积，带绝缘管套	-
☞ 锁线螺钉规格	-
☞ 锁线螺钉扭矩	-
☞ 固定螺钉规格	-
☞ 剥线长度	-
☞ 使用组别	B/C/D

宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号
High-tech Industrial Development
Zone, Cixi City, Zhejiang Province,
China

Zip code: 315303

邮编：315303

Switchboard: +86 574-63288158

总机：+86 574-63288158

Fax: +86 574-63288170

传真：+86 574-63288170

E-mail：supucontact@supu.cn

E-mail：supucontact@supu.cn

Service Hotline: 400-626-6336

服务热线：400-626-6336



官方微信