


产品名称:MC-PA5.08H08-G-0002

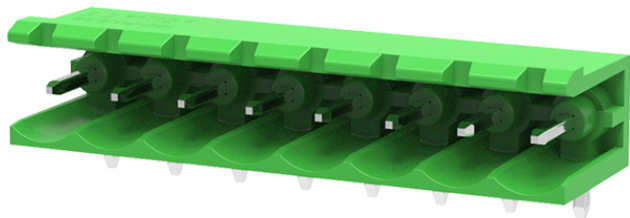

额定电流：18A 颜色：可定制

Technical drawing of a PCB layout for a 4-pin connector. The drawing includes a side view and a top view.

Side View Dimensions:

- Connector height: 8.45
- Pin diameter: 2.00
- Total width: 12.00
- Pin offset from left edge: 3.50 ± 0.30

Top View Dimensions:

- Pin pitch: 5.08
- Pin diameter: $\phi 1.40$
- Total width: 12.00
- Pin offset from left edge: 2.54
- Pin offset from top edge: 3.80
- Pin offset from right edge: 1.00
- Pin offset from bottom edge: 2.54
- Pin offset from center: 5.08
- Pin offset from center (alternative): $\text{Dim. } a = 5.08 \times (P-1)$
- Pin offset from center (alternative): $\text{Dim. } b = 5.08 \times P$

PCB LAYOUT

参数

产品型号	MC-PA5.08H08-G-0002
产品间距	5.08
接线位数	8
接线方式	-

☞ 防护等级	IP20
☞ 工作温度	-40~+105°C
☞ 绝缘材料	PA66
☞ 绝缘材料组别	I
☞ 导电体材料	Copper alloy
☞ 导电体表面镀层	Sn,Plated
☞ 颜色	绿/黑/蓝/灰/橙/红

技术数据

☞ 额定电流（IEC）	18A
☞ 额定电压（IEC）	320V
☞ 过压类别	III III II
☞ 污染等级	3 2 2
☞ 额定冲击电压	4.0KV 4.0KV 4.0KV
☞ 额定电流（UL）	15A - 10A
☞ 额定电压(UL)	300V - 300V
☞ 硬导线截面积	-
☞ 柔性导线截面积	-
☞ 柔性导线截面积，带绝缘管套	-
☞ 锁线螺钉规格	-
☞ 锁线螺钉扭矩	-
☞ 固定螺钉规格	-
☞ 剥线长度	-
☞ 使用组别	B/C/D

宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号
High-tech Industrial Development
Zone, Cixi City, Zhejiang Province,
China

Zip code: 315303

邮编：315303

Switchboard: +86 574-63288158

总机：+86 574-63288158

Fax: +86 574-63288170

传真：+86 574-63288170

E-mail：supucontact@supu.cn

E-mail：supucontact@supu.cn

Service Hotline: 400-626-6336

服务热线：400-626-6336



官方微信