


产品名称:MC-PA5.08H18-G-0002

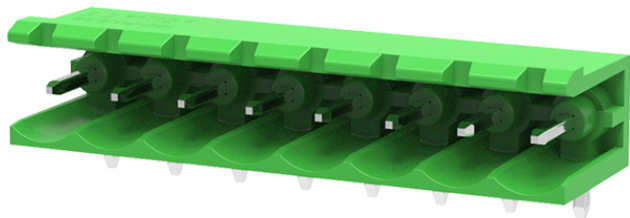

额定电流：18A 颜色：可定制

Technical drawing of a PCB layout for a 4-pin connector. The drawing includes a side view and a top view.

**Side View Dimensions:**

- Connector height: 8.45
- Pin diameter: 2.00
- Total width: 12.00
- Pin offset from left edge: 3.50 ± 0.30

**Top View Dimensions:**

- Pin pitch: 5.08
- Pin diameter:  $\phi 1.40$
- Total width: 12.00
- Pin offset from left edge: 2.54
- Pin offset from top edge: 3.80
- Pin offset from bottom edge: 2.00
- Pin offset from right edge: 1.00
- Pin offset from center: 5.08
- Pin offset from center:  $\text{Dim. } a = 5.08 \times (P-1)$
- Pin offset from center:  $\text{Dim. } b = 5.08 \times P$

PCB LAYOUT

## 参数

|      |                     |
|------|---------------------|
| 产品型号 | MC-PA5.08H18-G-0002 |
| 产品间距 | 5.08                |
| 接线位数 | 18                  |
| 接线方式 | -                   |

|           |              |
|-----------|--------------|
| ☞ 防护等级    | IP20         |
| ☞ 工作温度    | -40~+105°C   |
| ☞ 绝缘材料    | PA66         |
| ☞ 绝缘材料组别  | I            |
| ☞ 导电体材料   | Copper alloy |
| ☞ 导电体表面镀层 | Sn,Plated    |
| ☞ 颜色      | 绿/黑/蓝/灰/橙/红  |

技术数据

|                 |                   |
|-----------------|-------------------|
| ☞ 额定电流（IEC）     | 18A               |
| ☞ 额定电压（IEC）     | 320V              |
| ☞ 过压类别          | III III II        |
| ☞ 污染等级          | 3 2 2             |
| ☞ 额定冲击电压        | 4.0KV 4.0KV 4.0KV |
| ☞ 额定电流（UL）      | 15A - 10A         |
| ☞ 额定电压(UL)      | 300V - 300V       |
| ☞ 硬导线截面积        | -                 |
| ☞ 柔性导线截面积       | -                 |
| ☞ 柔性导线截面积，带绝缘管套 | -                 |
| ☞ 锁线螺钉规格        | -                 |
| ☞ 锁线螺钉扭矩        | -                 |
| ☞ 固定螺钉规格        | -                 |
| ☞ 剥线长度          | -                 |
| ☞ 使用组别          | B/C/D             |

## 宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号  
High-tech Industrial Development  
Zone, Cixi City, Zhejiang Province,  
China

Zip code: 315303

邮编：315303

Switchboard: +86 574-63288158

总机：+86 574-63288158

Fax: +86 574-63288170

传真：+86 574-63288170

E-mail：supucontact@supu.cn

E-mail：supucontact@supu.cn

Service Hotline: 400-626-6336

服务热线：400-626-6336



官方微信