


产品名称:MC-PA5.08V17-D-0002

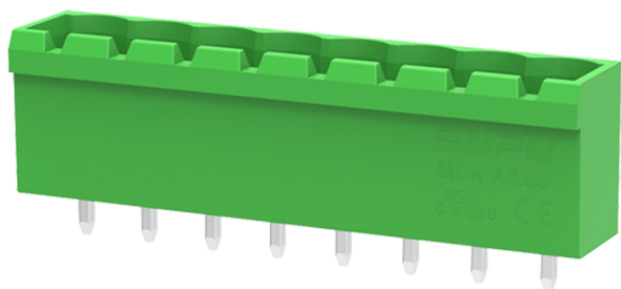

额定电流：18A 颜色：可定制

Technical drawing of the PCB layout for the 100-pin connector. The drawing includes three views: a side profile, a top view, and a bottom view. The side profile shows a total width of 12.00, a mounting hole diameter of 3.80, and a mounting tab width of 1.00. The top view shows a 4-pin configuration with a pitch of 5.08. The bottom view shows the pin locations with a 3.54 offset from the edge and a 1.40 diameter for the mounting holes. Dimensions are given in millimeters.

参数

产品型号	MC-PA5.08V17-D-0002
产品间距	5.08
接线位数	17
接线方式	-

☞ 防护等级	IP20
☞ 工作温度	-40~+105°C
☞ 绝缘材料	PA66
☞ 绝缘材料组别	I
☞ 导电体材料	Copper alloy
☞ 导电体表面镀层	Sn,Plated
☞ 颜色	绿/黑/蓝/灰/橙/红

技术数据

☞ 额定电流（IEC）	18A
☞ 额定电压（IEC）	320V
☞ 过压类别	III III II
☞ 污染等级	3 2 2
☞ 额定冲击电压	4.0KV 4.0KV 4.0KV
☞ 额定电流（UL）	15A - 10A
☞ 额定电压(UL)	300V - 300V
☞ 硬导线截面积	-
☞ 柔性导线截面积	-
☞ 柔性导线截面积，带绝缘管套	-
☞ 锁线螺钉规格	-
☞ 锁线螺钉扭矩	-
☞ 固定螺钉规格	-
☞ 剥线长度	-
☞ 使用组别	B/C/D

宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号
High-tech Industrial Development
Zone, Cixi City, Zhejiang Province,
China

Zip code: 315303

邮编：315303

Switchboard: +86 574-63288158

总机：+86 574-63288158

Fax: +86 574-63288170

传真：+86 574-63288170

E-mail：supucontact@supu.cn

E-mail：supucontact@supu.cn

Service Hotline: 400-626-6336

服务热线：400-626-6336



官方微信