


产品名称:MC-PD5.08V05-0001

额定电流：8A 颜色：可定制

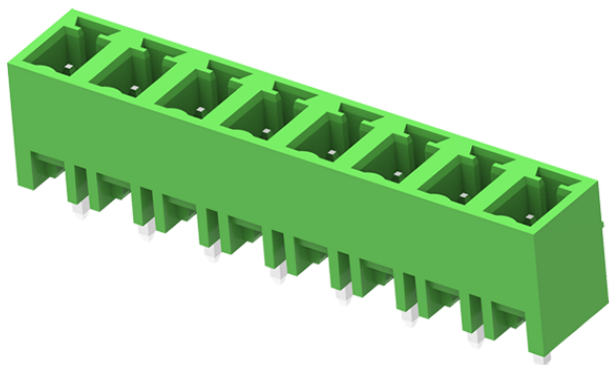

Technical drawing of the PCB layout for the 100-pin connector. The drawing shows two views: a top view and a side view.

Top View Dimensions:

- Overall width: 9.20
- Overall height: 7.25
- Pin pitch (center-to-center): 2.54
- Pin pitch (edge-to-center): 5.08
- Pin pitch (center-to-center): $5.08 \times (P-1)$
- Pin pitch (center-to-center): $5.08 \times P$
- Pin pitch (edge-to-center): 3.50 ± 0.30

Side View Dimensions:

- Board thickness: 3.00
- Pin pitch (center-to-center): 2.54
- Pin pitch (center-to-center): 5.08
- Pin pitch (center-to-center): $5.08 \times (P-1)$
- Pin pitch (center-to-center): $5.08 \times P$
- Pin pitch (edge-to-center): 3.00
- Pin pitch (edge-to-center): 7.25
- Pin pitch (edge-to-center): $\phi 1.20$

PCB LAYOUT

参数

产品型号	MC-PD5.08V05-0001
产品间距	5.08
接线位数	5
接线方式	-

⌘ 防护等级	IP20
⌘ 工作温度	-40~+105°C
⌘ 绝缘材料	PA66
⌘ 绝缘材料组别	I
⌘ 导电体材料	Copper alloy
⌘ 导电体表面镀层	Sn,Plated
⌘ 颜色	绿/黑/蓝/灰/橙/红

技术数据

⌘ 额定电流（IEC）	8A
⌘ 额定电压（IEC）	320V
⌘ 过压类别	III III II
⌘ 污染等级	3 2 2
⌘ 额定冲击电压	4.0KV 4.0KV 4.0KV
⌘ 额定电流（UL）	8A - 8A
⌘ 额定电压(UL)	300V - 300V
⌘ 硬导线截面积	-
⌘ 柔性导线截面积	-
⌘ 柔性导线截面积，带绝缘管套	-
⌘ 锁线螺钉规格	-
⌘ 锁线螺钉扭矩	-
⌘ 固定螺钉规格	-
⌘ 剥线长度	-
⌘ 使用组别	B/C/D

宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号
High-tech Industrial Development
Zone, Cixi City, Zhejiang Province,
China

Zip code: 315303

邮编：315303

Switchboard: +86 574-63288158

总机：+86 574-63288158

Fax: +86 574-63288170

传真：+86 574-63288170

E-mail：supucontact@supu.cn

E-mail：supucontact@supu.cn

Service Hotline: 400-626-6336

服务热线：400-626-6336



官方微信