


产品名称:MC-PD5.08V03-F-0001

额定电流：8A 颜色：可定制

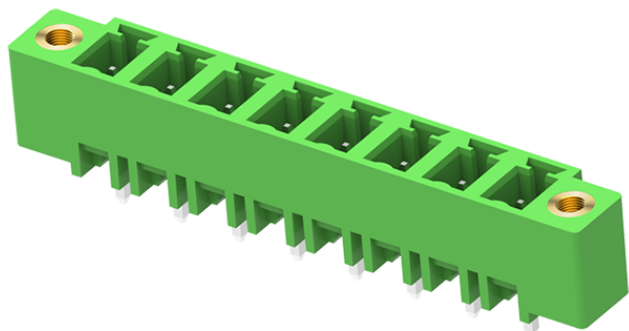

Technical drawing of the PCB layout for the 120W LED module, showing dimensions in millimeters (mm).

Top View Dimensions:

- Overall width: 3.50 ± 0.30
- Overall height: 7.25
- Distance from left edge to first LED: 4.50
- Distance between LEDs: 5.08
- Distance from last LED to right edge: 7.10
- Formula for distance between LEDs: $\text{Dim. a} = 5.08 \times (P - 1)$
- Formula for overall width: $\text{Dim. b} = 5.08 \times P + 9.12$

Bottom View Dimensions:

- Overall width: 3.50 ± 0.30
- Overall height: 7.25
- Distance from left edge to first LED: 4.50
- Distance between LEDs: 5.08
- Distance from last LED to right edge: 7.10
- Formula for distance between LEDs: $\text{Dim. a} = 5.08 \times (P - 1)$
- Formula for overall width: $\text{Dim. b} = 5.08 \times P + 9.12$
- LED diameter: $\phi 2.40$
- Mounting hole diameter: $\phi 1.20$

PCB LAYOUT

参数

☞ 产品型号	MC-PD5.08V03-F-0001
☞ 产品间距	5.08
☞ 接线位数	3
☞ 接线方式	-

⌘ 防护等级	IP20
⌘ 工作温度	-40~+105°C
⌘ 绝缘材料	PA66
⌘ 绝缘材料组别	I
⌘ 导电体材料	Copper alloy
⌘ 导电体表面镀层	Sn,Plated
⌘ 颜色	绿/黑/蓝/灰/橙/红

技术数据

⌘ 额定电流（IEC）	8A
⌘ 额定电压（IEC）	320V
⌘ 过压类别	III III II
⌘ 污染等级	3 2 2
⌘ 额定冲击电压	4.0KV 4.0KV 4.0KV
⌘ 额定电流（UL）	8A - 8A
⌘ 额定电压(UL)	300V - 300V
⌘ 硬导线截面积	-
⌘ 柔性导线截面积	-
⌘ 柔性导线截面积，带绝缘管套	-
⌘ 锁线螺钉规格	-
⌘ 锁线螺钉扭矩	-
⌘ 固定螺钉规格	-
⌘ 剥线长度	-
⌘ 使用组别	B/C/D

宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号
High-tech Industrial Development
Zone, Cixi City, Zhejiang Province,
China

Zip code: 315303

邮编：315303

Switchboard: +86 574-63288158

总机：+86 574-63288158

Fax: +86 574-63288170

传真：+86 574-63288170

E-mail：supucontact@supu.cn

E-mail：supucontact@supu.cn

Service Hotline: 400-626-6336

服务热线：400-626-6336



官方微信