


产品名称:MC-TC5.08H20P-N-0001

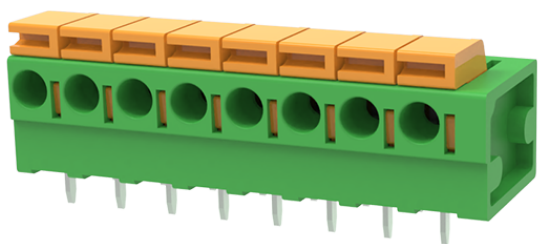

颜色：可定制

Technical drawings of the PCB layout for the 100-pin connector. The drawings include a top view, a side view, and a detailed view of the connector pins. Dimensions are provided in millimeters.

Top View: Shows a rectangular board with a width of 10.50 mm and a length of 14.10 mm. The board has a central cutout and a circular hole with a diameter of 1.40 mm. The layout includes a central cutout and a circular hole with a diameter of 1.40 mm. The layout also shows the positions of the connector pins and the dimensions of the mounting holes.

Side View: Shows a height of 13.40 mm. The board has a central cutout and a circular hole with a diameter of 1.40 mm. The layout includes a central cutout and a circular hole with a diameter of 1.40 mm. The layout also shows the positions of the connector pins and the dimensions of the mounting holes.

Connector Pins: The pins are spaced at a pitch of 5.08 mm. The total length of the pins is 5.08xP+2.54 mm. The pins are shown in a detailed view with dimensions 5.08, 0.50, and 1.00 mm.

PCB Layout: Shows a rectangular board with a width of 14.10 mm and a length of 5.08xP+2.54 mm. The layout includes a central cutout and a circular hole with a diameter of 1.40 mm. The layout also shows the positions of the connector pins and the dimensions of the mounting holes.

参数

产品型号	MC-TC5.08H20P-N-0001
产品间距	5.08
产品层数	单层
接线位数	20

☞ 接线方式	直插弹簧接线
☞ 防护等级	IP20
☞ 工作温度	-40~+105℃
☞ 绝缘材料	PA66
☞ 绝缘材料组别	I
☞ 导电体材料	Copper alloy
☞ 导电体表面镀层	Sn,Plated
☞ 颜色	绿/黑/蓝/灰/橙/红

技术数据

☞ 额定电流（IEC）	15A
☞ 额定电压（IEC）	400V
☞ 过压类别	III/III/ II
☞ 污染等级	3 2 2
☞ 额定冲击电压	4.0KV 4.0KV 4.0KV
☞ 额定电流（UL）	10A - 10A
☞ 额定电压(UL)	300V - 300V
☞ 硬导线截面积	0.2-1.5mm ²
☞ 柔性导线截面积	0.2-1.5mm ²
☞ 柔性导线截面积，带绝缘管套	0.25-1.0mm ²
☞ 锁线螺钉规格	-
☞ 锁线螺钉扭矩	-
☞ 固定螺钉规格	-
☞ 剥线长度	10mm

宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号
High-tech Industrial Development
Zone, Cixi City, Zhejiang Province,
China

Zip code: 315303

邮编：315303

Switchboard: +86 574-63288158

总机：+86 574-63288158

Fax: +86 574-63288170

传真：+86 574-63288170

E-mail：supucontact@supu.cn

E-mail：supucontact@supu.cn

Service Hotline: 400-626-6336

服务热线：400-626-6336



官方微信