


产品名称:MC-TC7.62H15P-N-0001

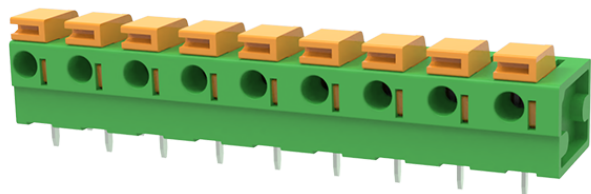

颜色：可定制

Technical drawing of the PCB layout for the nens module. The drawing includes three views: a top view, a side view, and a bottom view.

Top View: Shows the module's footprint with a height of 10.50 and a width of 14.10. The nens logo is visible. The mounting holes are spaced 7.62 apart, with a total width of $7.62 \times P$ and a total height of $7.62 \times (P-1)$. The distance from the edge to the first hole is 2.54.

Side View: Shows the module's profile with a height of 13.40. The mounting holes are spaced 7.62 apart, with a total width of $7.62 \times P$ and a total height of $7.62 \times (P-1)$. The distance from the edge to the first hole is 2.54.

Bottom View: Shows the PCB layout with a grid of holes. The hole diameter is $\phi 1.40$. The pitch between holes is 7.62. The distance from the edge to the first hole is 1.75. The total width is $7.62 \times P$ and the total height is $7.62 \times (P-1)$.

PCB LAYOUT

参数

☞ 产品型号	MC-TC7.62H15P-N-0001
☞ 产品间距	7.62
☞ 产品层数	单层
☞ 接线位数	15

☞ 接线方式	直插弹簧接线
☞ 防护等级	IP20
☞ 工作温度	-40~+105℃
☞ 绝缘材料	PA66
☞ 绝缘材料组别	I
☞ 导电体材料	Copper alloy
☞ 导电体表面镀层	Sn,Plated
☞ 颜色	绿/黑/蓝/灰/橙/红

技术数据

☞ 额定电流（IEC）	15A
☞ 额定电压（IEC）	630V
☞ 过压类别	III/III/ II
☞ 污染等级	3 2 2
☞ 额定冲击电压	6.0KV 6.0KV 6.0KV
☞ 额定电流（UL）	10A - 10A
☞ 额定电压(UL)	300V - 300V
☞ 硬导线截面积	0.2-1.5mm ²
☞ 柔性导线截面积	0.2-1.5mm ²
☞ 柔性导线截面积，带绝缘管套	0.25-1.0mm ²
☞ 锁线螺钉规格	-
☞ 锁线螺钉扭矩	-
☞ 固定螺钉规格	-
☞ 剥线长度	10mm

宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号
High-tech Industrial Development
Zone, Cixi City, Zhejiang Province,
China

Zip code: 315303

邮编：315303

Switchboard: +86 574-63288158

总机：+86 574-63288158

Fax: +86 574-63288170

传真：+86 574-63288170

E-mail：supucontact@supu.cn

E-mail：supucontact@supu.cn

Service Hotline: 400-626-6336

服务热线：400-626-6336



官方微信