


产品名称:MC-TC5.08H18P-N-0001

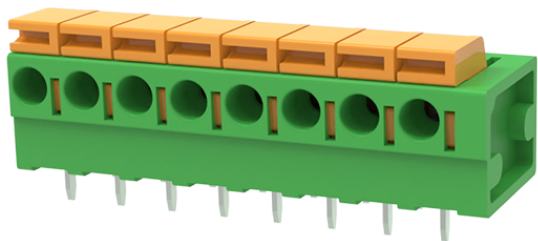

颜色：可定制

Technical drawings of the PCB layout for the M23L-CM module. The drawings include a top view, a side view, and a bottom view. The top view shows the module's footprint with dimensions: 10.50 (height), 14.10 (width), and 13.40 (depth). The side view shows the module's profile with dimensions: 1.00 (height), 7.62 (width), and 1.75 (depth). The bottom view shows the PCB layout with dimensions: 2.54 (height), 5.08 (width), and 14.10 (depth). The PCB layout includes a central cutout and a circular hole with a diameter of 1.40. The dimensions are given in millimeters.

参数

产品型号	MC-TC5.08H18P-N-0001
产品间距	5.08
产品层数	单层
接线位数	18

☞ 接线方式	直插弹簧接线
☞ 防护等级	IP20
☞ 工作温度	-40~+105℃
☞ 绝缘材料	PA66
☞ 绝缘材料组别	I
☞ 导电体材料	Copper alloy
☞ 导电体表面镀层	Sn,Plated
☞ 颜色	绿/黑/蓝/灰/橙/红

技术数据

☞ 额定电流（IEC）	15A
☞ 额定电压（IEC）	400V
☞ 过压类别	III/III/ II
☞ 污染等级	3 2 2
☞ 额定冲击电压	4.0KV 4.0KV 4.0KV
☞ 额定电流（UL）	10A - 10A
☞ 额定电压(UL)	300V - 300V
☞ 硬导线截面积	0.2-1.5mm ²
☞ 柔性导线截面积	0.2-1.5mm ²
☞ 柔性导线截面积，带绝缘管套	0.25-1.0mm ²
☞ 锁线螺钉规格	-
☞ 锁线螺钉扭矩	-
☞ 固定螺钉规格	-
☞ 固定螺钉扭矩	-

剥线长度	10mm
使用组别	B/C/D
额定接线容量	24-16AWG

商业数据

订货号	MC-TC5.08H18P-N-0001
-----	----------------------

宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号
High-tech Industrial Development
Zone, Cixi City, Zhejiang Province,
China

Zip code: 315303	邮编：315303
Switchboard: +86 574-63288158	总机：+86 574-63288158
Fax: +86 574-63288170	传真：+86 574-63288170
E-mail：supucontact@supu.cn	E-mail：supucontact@supu.cn
Service Hotline: 400-626-6336	服务热线：400-626-6336



官方微信