


产品名称:TBR150-02C-LR-001

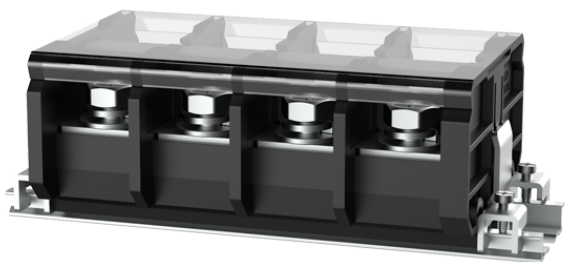

间距：27.0mm，额定电压UL600V，额定电流UL150A，颜
2/0AWG


Technical drawing of the 27.0xP-8 valve assembly, showing front and side views with dimensions.

Front View Dimensions:

- Overall width: $27.0 \times P + 8$
- Distance between valve centers: $27.0 \times (P-1)$
- Valve center-to-center distance: 27
- Valve diameter: 4.8 ± 0.3
- Valve spacing from side flange: 3
- Valve spacing from side flange: 24
- Overall width including side flanges: $27.0 \times P + 22.2$

Side View Dimensions:

- Overall height: 32

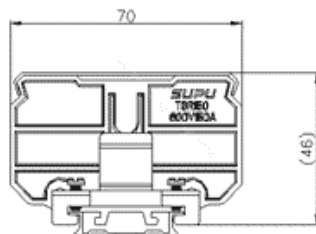

参数

产品型号	TBR150-02C-LR-001
产品间距	27
产品层数	单层
接线位数	4

☞ 接线方式	螺钉接线
☞ 防护等级	IP20
☞ 工作温度	-40℃ ~+125℃
☞ 绝缘材料	PC
☞ 绝缘材料组别	III
☞ 导电体材料	Copper alloy
☞ 导电体表面镀层	Sn plated
☞ 安装方式	法兰固定
☞ 类别	中继式

技术数据

☞ 额定电流（IEC）	150/150/150
☞ 额定电压（IEC）	1000/1000/1000
☞ 过压类别	III/III/ II
☞ 污染等级	3/2/2
☞ 额定冲击电压	/
☞ 额定电流（UL）	150/150/5
☞ 额定电压(UL)	600/600/600
☞ 剥线长度	16-18
☞ 紧固扭矩(Lb.in)	40
☞ 导线截面积（AWG）	20-2/0

商业数据

☞ 订货号	TBR150-02C-LR-001
-------	-------------------

宁波速普电子有限公司

Address: No. 150, Xinxing 4th Road, 地址：浙江省慈溪市高新技术产业开发区新兴四路150号
High-tech Industrial Development
Zone, Cixi City, Zhejiang Province,
China

Zip code: 315303

邮编：315303

Switchboard: +86 574-63288158

总机：+86 574-63288158

Fax: +86 574-63288170

传真：+86 574-63288170

E-mail：supucontact@supu.cn

E-mail：supucontact@supu.cn

Service Hotline: 400-626-6336

服务热线：400-626-6336



官方微信